

Slim & All XLB-HPL




Upgraded Performance

- Faster Instruction Times: 40ns/step
- Larger Memory: 64Ksteps of built-in program memory
- Controllable I/O: 256 points
- Expandability: 7 cards
- Pulse positioning 6 axes, CAM control

Simple Integration & Easy Maintenance

- Slimmer size (width : 41mm): ideal for simple and space conscious applications
- Embedded Ethernet communication port
- Data retention: no data loss even after long term of power-off state (battery embedded)

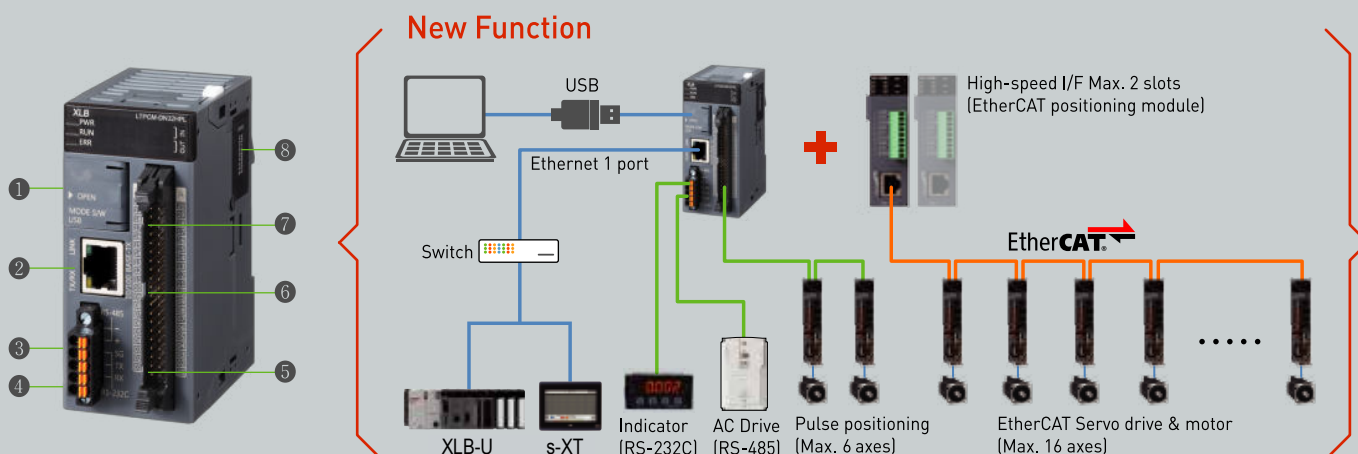

Built in Function



① Loader USB



② Ethernet



③ RS-485 Cnet



④ RS-232 Cnet



⑤ Pulse positioning (Max. 6 axes)



⑥ DC input 16 points



⑦ High-speed counter 4Ch




⑧ Network positioning Max. 16 axes (Option)

Slim & All **XLB-HPL**

Slim Fit


Compact Design

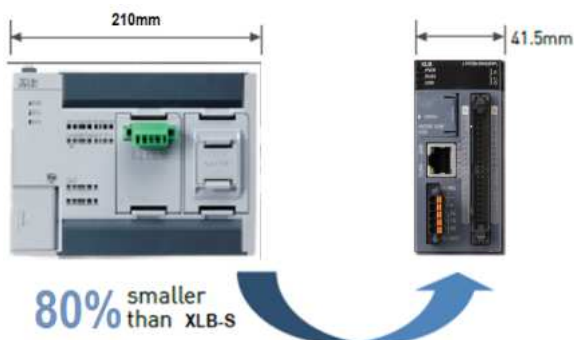


Flexible Connectivity

Maximized Productivity with Enhanced Ethernet Capacity

In case of Local Ethernet Access

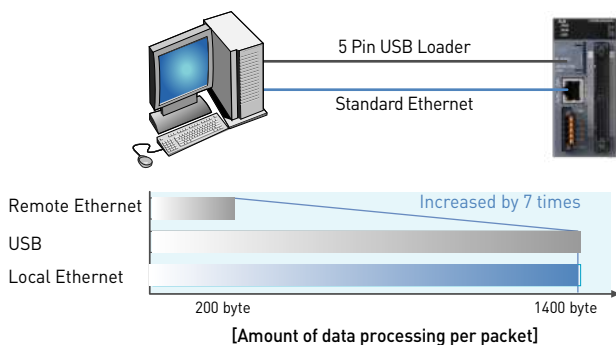


P2P communication channel

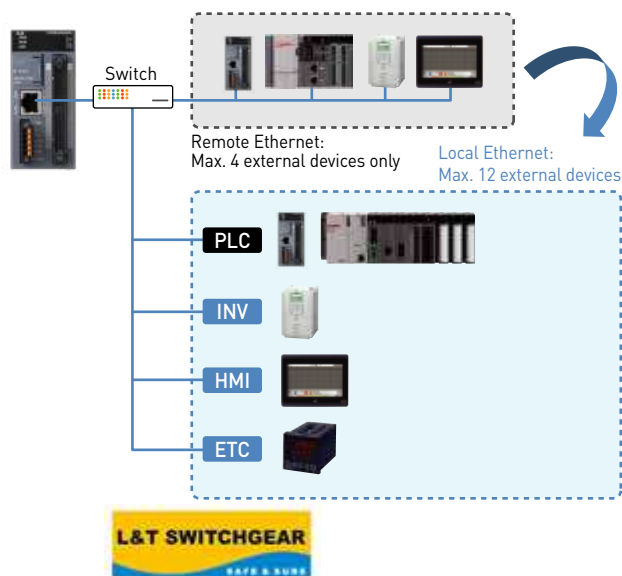

Powerful Performance


Instruction Times

2 times faster than XLB-S



Program Memory

6 times larger than XBM-S




Embedded Battery

Permanent storage of data and program with embedded MRAM (Magnetic Random Access Memory)




Maximized Productivity & Minimized TCO


High-speed Backplane Interface

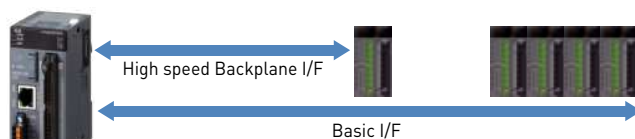


Interface Speed

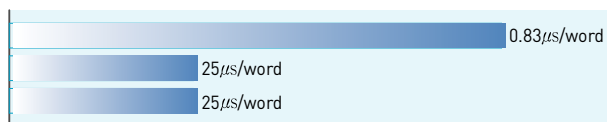

High-speed Backplane Expansion Module

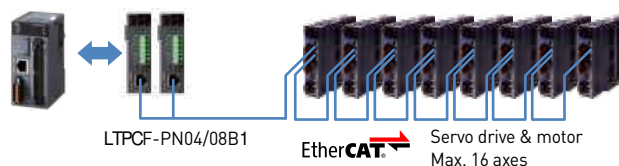

Built-in Pulse Positioning Function



L&T Electrical & Automation

L&T Electrical & Automation, Electrical Standard Products

L&T Business Park TC-2 Tower B, 3rd Floor, Gate No.5 Powai Campus, Saki Vihar Road, Mumbai 400 071, INDIA www.Lntebq.com

Customer Interaction Centre (CIC)

BSNL/MTNL (toll free): 1800 233 585 Reliance (toll free): 1800 200 5858

Tel: 022 6774 5858 E-mail: cic@Lntebq.com / Website: www.Lntebq.com